

## TPIM001 PIM I/O Module with 50 pin Connector

### Application Information

The TPIM001 is a standard single-width PIM I/O module to be used with any PIM carrier. It offers easy access to the PMC back I/O lines of PMC carrier with back I/O.

The TPIM001 distributes the lower 50 I/O lines of the PMC to a standard 50 pin SCSI-2 type connector located in the EMI front panel.

The operating temperature range is -40°C to +85°C.


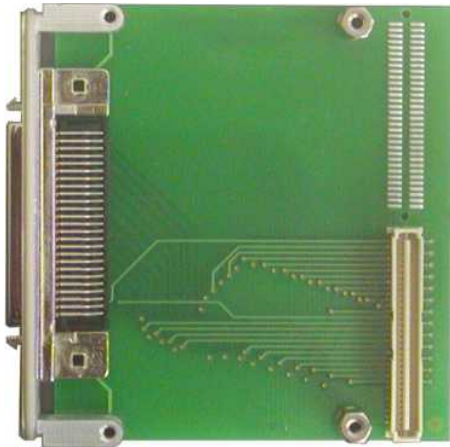


Figure: TPIM001-10

### Technical Information

- Standard single-width PIM I/O Module
- Board size: 69 mm x 74 mm
- I/O lines 1 to 50 are routed to a HD50 SCSI-2 type connector in the front panel
- EMI Front Panel
- Operating Temperature: -40°C to +85°C

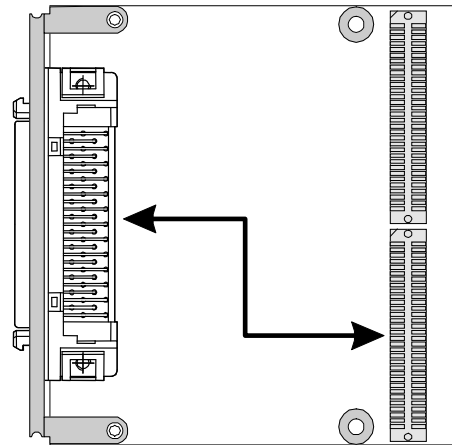

### Order Information

<b>TPIM001-10R</b>	PIM I/O Module with HD50 SCSI-2 type connector
TPIM001-10	None RoHS compliant version of TPIM001-10R
<b>TPIM001-DOC</b>	User Manual



Ehlbeek 15a  
30938 Burgwedel  
fon 05139-9980-0      www.powerbridge.de  
fax 05139-9980-49    info@powerbridge.de

TEWS TECHNOLOGIES GmbH keeps the right to change technical specification without further notice.  
All trademarks mentioned are property of their respective owners.

09/2009