


## TPMC542 16/8 Channel Voltage & Current Range D/A and 20 Channel LVTTTL/TTL Digital I/O

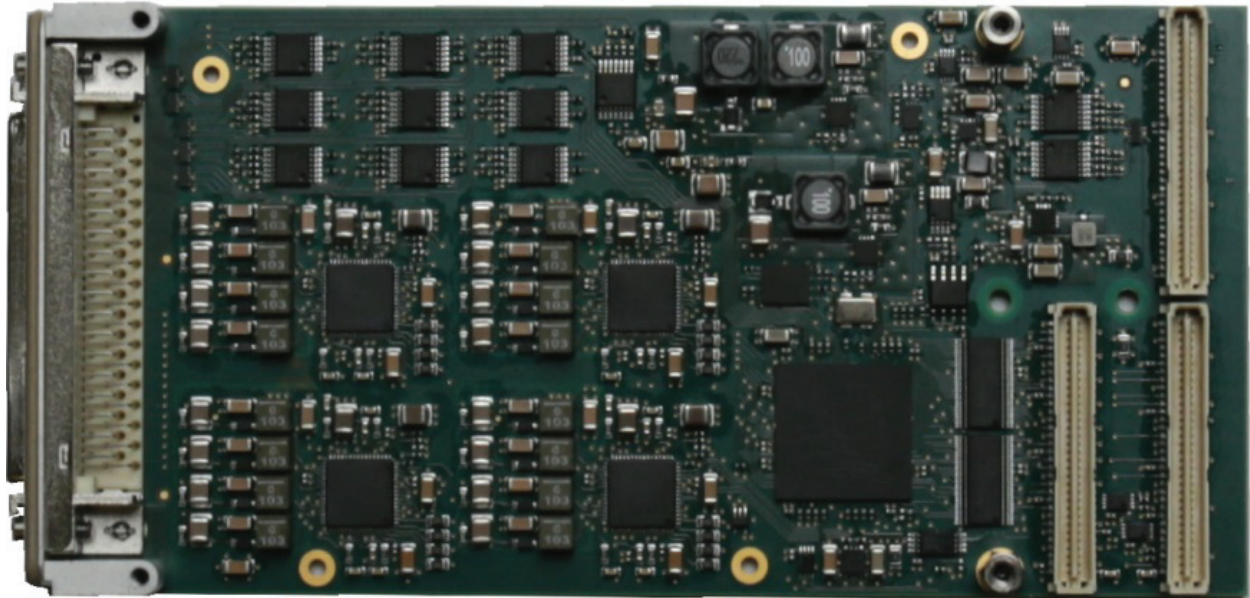

### Application Information

The TPMC542 is a standard single-wide PCI Mezzanine Card (PMC) compatible module providing 16 or 8 channels of simultaneous update single-ended unipolar/bipolar 16bit analog output and 20 channels of tristate capable 5V-tolerant LVTTTL/TTL digital input/output.

A 32 bit 33 MHz PCI interface is provided at the PMC P11 and P12 connectors. The digital I/O signals and analog output signals are accessible via a Mini D Ribbon (MDR68) type front I/O connector.

For each individual D/A channel, the following output ranges are configurable:

- 0V to 5V Voltage Range
- 0V to 10V Voltage Range
- $\pm 5V$  Voltage Range
- $\pm 10V$  Voltage Range
- 4mA to 20mA Current Range
- 0mA to 20mA Current Range
- 0mA to 24mA Current Range

Additionally, for each Voltage Range a 20% over-range may be enabled.

The TPMC542 provides a D/A Sequencer unit for periodic simultaneous digital to analog conversions at a configurable conversion rate. In sequencer mode, the D/A conversion data is fetched from buffers in host memory by PCI master DMA transfer and is temporarily stored in an on-board data buffer. The Sequencer provides a Frame Mode used for repetitive frames of simultaneous D/A conversions upon an appropriate frame trigger signal event.

Conversion clock (conversion rate) and frame trigger signals may be generated on-board for internal use and may also be driven out on P14 rear I/O if the card is operating as a master card in a Multi-Board configuration. The conversion clock (conversion rate) and frame trigger signals may also be sourced externally via the P14 rear I/O interface if the card is operating as a target card in a Multi-Board configuration.

Each TPMC542 is factory calibrated. The correction data is stored in an on-board serial EEPROM unique to each PMC module. These correction values may be used to perform a hardware correction for every D/A channel and output range.

TEWS TECHNOLOGIES GmbH keeps the right to change technical specification with All trademarks mentioned are property of their respective owners.

powerBridge  
Computer

TEWS TECHNOLOGIES GmbH  
Am Bahnhof 7 25469 Halstenf  
Phone: +49 (0) 4101 4058 0 Fax: +49 (0) 41  
e-mail: [info@tews.com](mailto:info@tews.com) www.tews.com

Ehlbeek 15a  
30938 Burgwedel  
fon 05139-9980-0  
fax 05139-9980-49

[www.powerbridge.de](http://www.powerbridge.de)  
[info@powerbridge.de](mailto:info@powerbridge.de)


## The Embedded I/O Company

The digital I/O lines are ESD protected. Each digital I/O line has a dedicated line transmitter with individual output enable control and a dedicated line receiver. The line receivers are always enabled, so the digital I/O line level can always be monitored. Each digital I/O line input is capable of generating an interrupt triggered on rising edge, falling edge or both.

Additionally, a debounce filter can be configured to get rid of bouncing on the digital I/O inputs. Each digital I/O line has a 4.7kΩ pull resistor to a common reference. The common pull resistor reference is programmable by software (one setting for all digital I/O lines) to +3.3V, +5V or GND.

### Technical Information

- Standard single-wide PCI Mezzanine Card (PMC)
  - 32bit / 33MHz PCI
  - DMA Master functionality
- 16 or 8 channels of simultaneous update single-ended unipolar/bipolar 16bit analog output
  - Up to 38ksps
  - Settling time: typ. 24μs
- Output voltage ranges:
  - 0-5V, 0-10V, ±5V, ±10V,
  - 0-6V, 0-12V, ±6V, ±12V,
  - Up to 10mA load with a capacitance up to 10nF
- Output current ranges
  - 4-20mA, 0-20mA, 0-24mA
- Hardware Correction
  - Factory calibrated
- Temperature Sensor on-board
- Programmable conversion rates
  - Can be output to other modules
  - Can be input from other modules
- Frame Trigger signal for synchronization purposes
- 20 channels of tristate capable 5V-tolerant TTL digital input/output
  - ESD protection
- Mini D Ribbon (MDR68) type front I/O connector

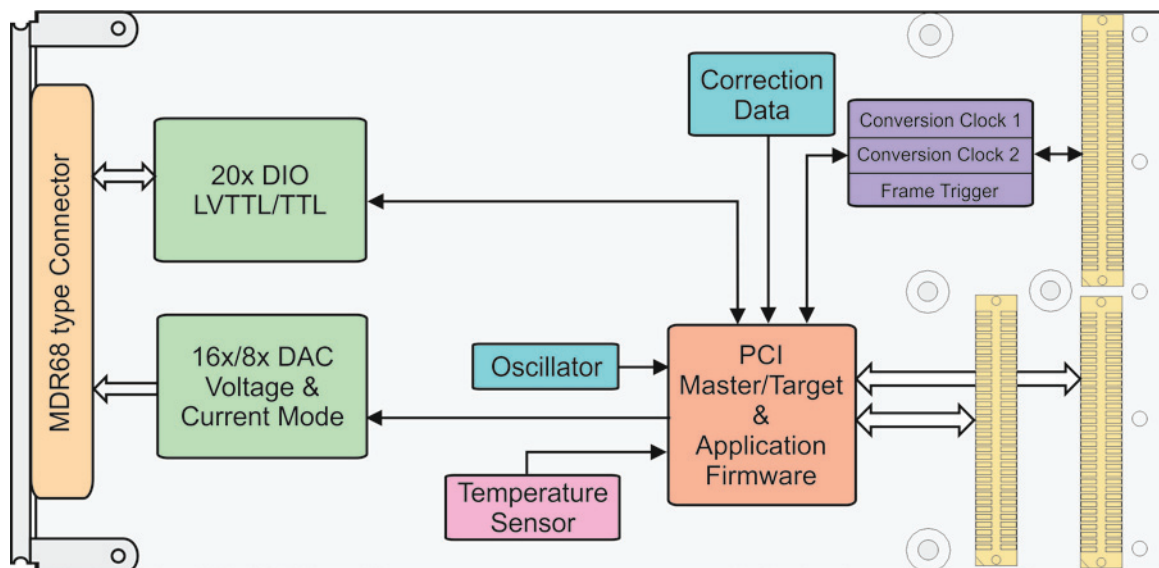

TPMC542 Block Diagram

## The Embedded I/O Company

---

### Order Information

#### RoHS Compliant

**TPMC542-10R** 16 Channels of Simultaneous Update Single-Ended 16 bit Voltage & Current Range D/A and 20 Channels of LVTTTL/TTL Digital I/O, with MDR68 front panel I/O

**TPMC542-20R** 8 Channels of Simultaneous Update Single-Ended 16 bit Voltage & Current Range D/A and 20 Channels of LVTTTL/TTL Digital I/O, with MDR68 front panel I/O

For the availability of non-RoHS compliant (leaded solder) products please contact TEWS.

#### Documentation

**TPMC542-DOC** User Manual

#### Software

**TDRV019-SW-25** Integrity Software Support

**TDRV019-SW-42** VxWorks Software Support (Legacy and VxBus-Enabled Software Support)

**TDRV019-SW-65** Windows Software Support

**TDRV019-SW-82** Linux Software Support

**TDRV019-SW-95** QNX Software Support

For other operating systems please contact TEWS.

#### Related Products

**TA113** MDR68 Cable

**TA207** MDR68 Terminal Block

**TA312** Cable Kit for Modules with MDR68 Connector