


VPX3001 Series

Rugged 3U VPX 3rd Generation Intel® Core™ i7 Processor Blade for Radar or ISR

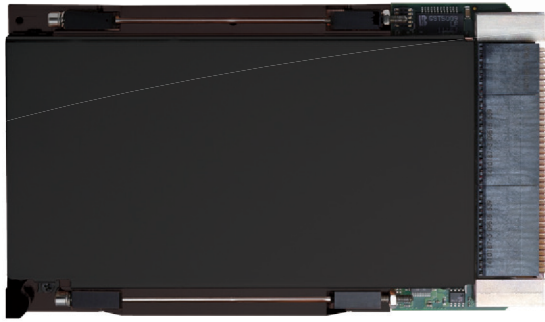

Features

- Quad-core 3rd Generation Intel® Core™ i7 processor with QM77 Express chipset
- DDR3-1333 soldered ECC SDRAM
- Two PCIe x4 Gen2 data plane to P1 with NTB
- Two 1000BASE-T or two 1000BASE-BX to P1
- One XMC.3 PCIe x8 Gen2 with Rear I/O to P2

VPX™ VPX^{REDI}™ OpenVPX™

**CONDUCTION
COOLED**

Specifications

Processor & System

CPU	Quad-core Intel® Core™ i7-3612QE 2.1GHz, 6MB LLC cache, 35W TDP
Chipset	Mobile Intel® QM77 Express Chipset
Memory	Dual channel DDR3-1333 ECC soldered SDRAM, up to 8GB
BIOS	AMI EFI on 64Mbit SPI flash
VITA Standards	VITA 46.0 VPX Base Standard VITA 46.4 PCI Express on VPX Fabric Connector VITA 46.6 Gigabit Ethernet Control Plane on VPX VITA 46.9 PMC/XMC/Rear IO Fabric Signal Mapping to 3U/6U VPX VITA 48.0 Ruggedized Enhanced Design Implementation Mechanical Base Specification VITA 65 OpenVPX Architecture Framework for VPX
Module Profile	MOD3-PAY-2F2T-16.2.5-3 MOD3-PAY-2F2U-16.2.3-3 (BOM option)
Slot Profile	SLT3-PAY-2F2T-14.2.5 SLT3-PAY-2F2U-14.2.3 (BOM option)

Connectivity

XMC	PCIe x8 Gen2 with rear IO to P2w1-X24s+X8d+X12d
Ethernet	Two 1000BASE-T to P1 Two 1000BASE-BX to P1 (BOM option)
Graphics	Intel® HD Graphics 4000 One VGA to P2
USB	Two USB 2.0 to P1
Serial Port	Two RS-232/422 to P1 One RS-232/422 to P2
PCI Express	2x PCIe x4 Gen2 to P1, configurable to 1 x8 or 1 x4 + 4 x1 Supports DMA and Non-transparent Bridge for peer to peer communication

Storage

SBC	Soldered 32GB SATA 3Gb/s boot flash One SATA 6Gb/s ports to P1
-----	---

Operating System

OS	Red Hat Enterprise Linux 6.2 Wind River VxWorks 6.9 Microsoft Windows 7 32/64-bit Microsoft Windows 7 Embedded (Please contact ADLINK for other OS support)
----	---

Miscellaneous

GPIO	Six 5V tolerance PCH controlled GPIO to P1/P2
HW Monitor	CPU temperature and power rails
Watchdog Timer	System reset or NMI with programmable interval
LEDs	Power LED (green)
Reset Button	Board reset button on front panel

Mechanical & Environmental

Form Factor	3U VPX 0.8" 100mm x 160mm x 20.3mm
Operating Temperature	-40°C to +75°C (at wedge lock)
Vibration	5Hz-2KHz, 12Grms, random, each axis, operating
Shock	Sawtooth 40G, 11ms, each axis, operating
Altitude	60,000 feet, operating
Power Consumption	100% CPU, memory, VGA, SSD stress 3612QE/M8G 41.7W VS1 (12) 1.9A, VS2 (3.3): 0.8A, VS3 (5V): 3.2A
Weight	515g
EMI/EMC	CE, FCC Class A

Ordering Information

Model Number	Description/Configuration
Processor Blades	
VPX3001/3612/M8/S32-R1	Quad-core Core™ i7-3612QE 35W with 8GB DDR3 ECC and 32GB SATA SSD soldered, card edge operating temp. -40°C to +75°C
VPX-R3001	RTM for VPX3001 with 2x 1000BASE-BX and VGA on front panel; 2x 1000BASE-T, 2x USB 2.0, SATA, 2x RS-232, GPIO pin headers, SMBus, JTAG XMC onboard
VPX3G10-R	XMC NVIDIA GT745M GPU card, conduction cooled
XMC-G745-R	XMC NVIDIA GT745M GPGPU card, conduction cooled
3U Test Frame	3U VPX test frame with tBP-VPX3000 backplane for users to validate VPX3001 functionality

powerBridge
Computer

Ehlbeek 15a
30938 Burgwedel
fon 05139-9980-0
fax 05139-9980-49

www.powerbridge.de
info@powerbridge.de

