
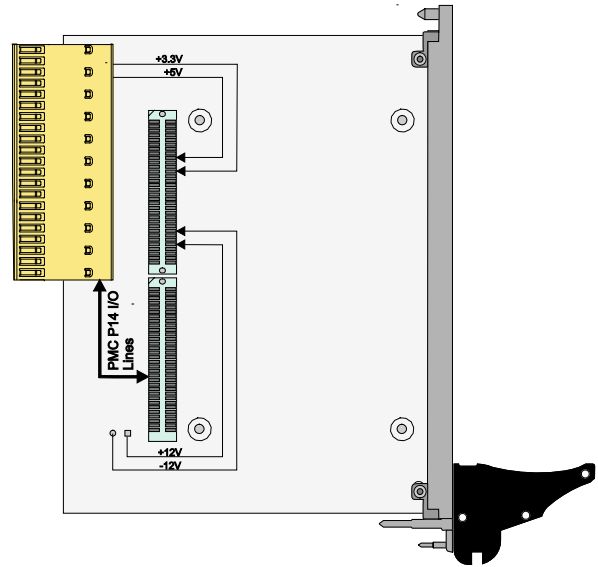


## TCP040-TM PIM Carrier Transition Module for 3U cPCI

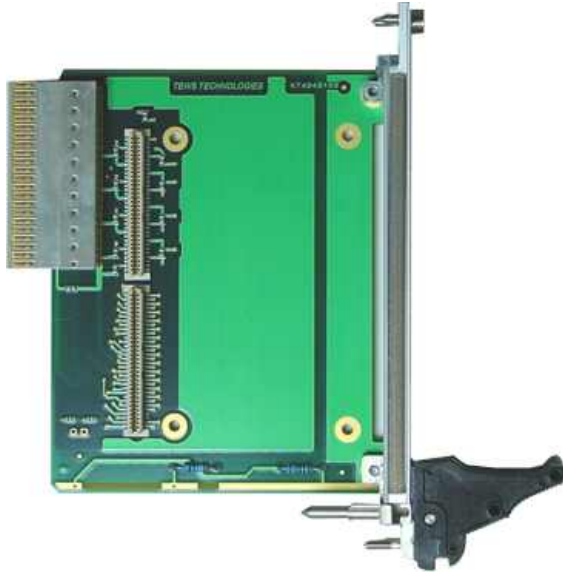

### Application Information

The TCP040-TM is a 3U PIM Carrier Transition Module to be used with 3U CompactPCI PMC carrier like TEWS' TCP270 or 3U CompactPCI modules with back I/O. It provides easy access to the PMC I/O lines of 3HE CompactPCI PMC carriers and most TEWS CompactPCI Modules with back I/O.

It distributes all I/O lines of one PMC from the cPCI RJ2 connector to a PIM module.

The operating temperature range is -40°C to +85°C.

### Technical Information

- Form Factor: cPCI 3U Rear Transition Module (100 mm x 80 mm)
- I/O Routing:
  - PMC I/O mapping via RJ2
  - I/O lines are accessible via the PIM modules
- EMI front panel
- Operating temperature: -40°C to +85°C

### Order Information

#### RoHS Compliant

**TCP040-TM-10R** 3U Transition Module for 1 slot PMC Carrier, 1 PIM slot

For the availability of non-RoHS compliant (lead solder) products please contact TEWS.

#### Documentation

**TCP040-TM-DOC** User Manual

#### Related Products

<b>TPIM001</b>	PIM I/O Module, HD50 connector
<b>TPIM002</b>	PIM I/O Module, HD68 connector
<b>TPIM003</b>	PIM I/O Module, HD68 connector, special pin assignment
<b>TPIM005</b>	PIM I/O Module, HD68 connector, for TPMC863/TPMC363
<b>TPIM006</b>	PIM I/O Module for Quad 10/100/1000 Ethernet PMC

**powerBridge**  
Computer 

Ehlbeek 15a  
30938 Burgwedel  
fon 05139-9980-0  
fax 05139-9980-49

www.powerbridge.de  
info@powerbridge.de

TEWS TECHNOLOGIES GmbH keeps the right to change technical specification without further notice.  
All trademarks mentioned are property of their respective owners.

Issue 1.0.1  
2017-08-17

#### TEWS TECHNOLOGIES GmbH

Am Bahnhof 7 25469 Halstenbek, Germany  
Phone: +49 (0) 4101 4058 0 Fax: +49 (0) 4101 4058 19  
e-mail: [info@tews.com](mailto:info@tews.com) [www.tews.com](http://www.tews.com)