


TPMC553 32 /16 Channels of 16 bit D/A

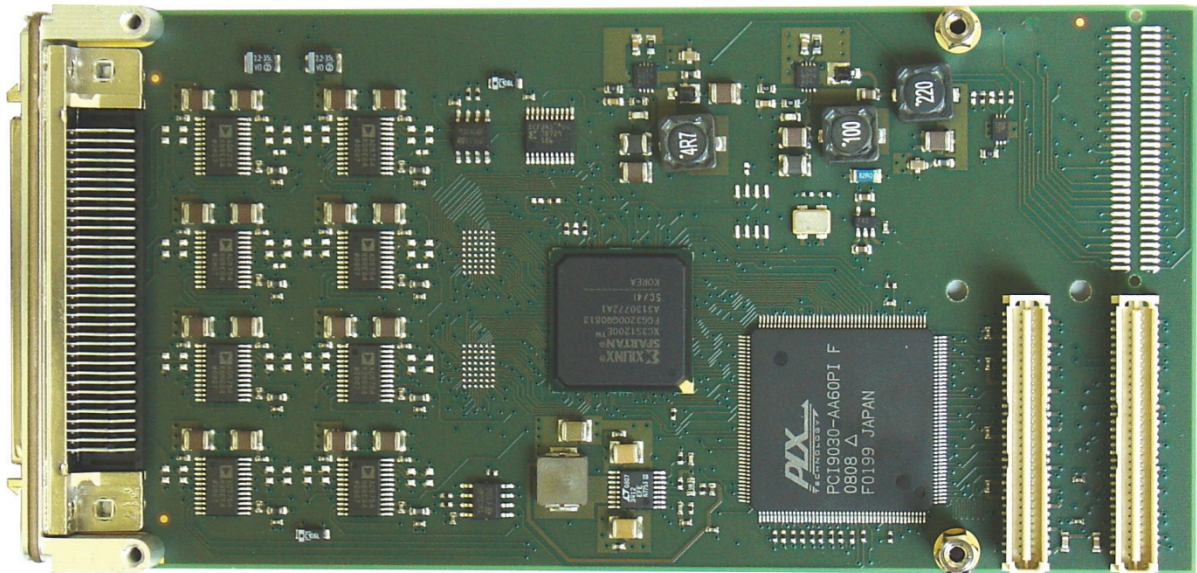

Application Information

The TPMC553 is a standard single-width 32 bit PMC module and provides 32/16 channels of 16 bit analog outputs. All signals are accessible through a HD68 SCSI-3 type front I/O connector.

The software selectable output voltage ranges are 0-5V, 0-10V, 0-10.8V, $\pm 5V$, $\pm 10V$ or $\pm 10.8V$. The output voltage range can be individually set per channel. The conversion time is typ. 10 μs and the DAC outputs are capable to drive a load of 2k Ω , with a capacitance up to 4000pF.

Beside of an individual channel update, the double buffered DACs allow simultaneous update of all channels.

Additionally a sequencer on the TPMC553 allows to periodically update enabled channels with a sequence timer range that extends from 10 μs to 167s.

Each TPMC553 is factory calibrated. The calibration information is stored in an on board serial EEPROM unique to each PMC module.

Software Support (TDRV016-SW-xx) is available for different operating systems.

Technical Information

- Form Factor: Standard single-width 32 bit PMC module conforming to IEEE P1386.1
 - Board size: 149 mm x 74 mm
 - Target Chip: PCI9030 (PLX Technology)
 - PCI 2.1 compliant interface
 - PCI I/O signaling voltage 5V or 3.3V
- 32/16 channels single-ended 16 bit analog output
 - Programmable output voltage: 0-5V, 0-10V, 0-10.8V, $\pm 5V$, $\pm 10V$, $\pm 10.8V$
 - Conversion time: typ. 10 μs
- Up to 2k Ω resistive, 4000pF capacitive load
- Overcurrent protection
- Individual channel update, simultaneous update of all channels or sequencer mode
- Factory calibration data stored in EEPROM
- Operating temperature -40°C to +85°C
- MTBF (MIL-HDBK217F/FN2 G_B 20°C):
 - TPMC553-10R: 683000 h
 - TPMC553-11R: 689000 h

powerBridge
Computer

Ehlbeek 15a
30938 Burgwedel
fon 05139-9980-0
fax 05139-9980-49

www.powerbridge.de
info@powerbridge.de


e-mail: info@tews.com

change technical specification without further notice.
ive owners.

TEWS TECHNOLOGIES GmbH

m Bahnhof 7 25469 Halstenbek, Germany
4101 4058 0 Fax: +49 (0) 4101 4058 19
www.tews.com

Issue 1.0.1
2017-08-31

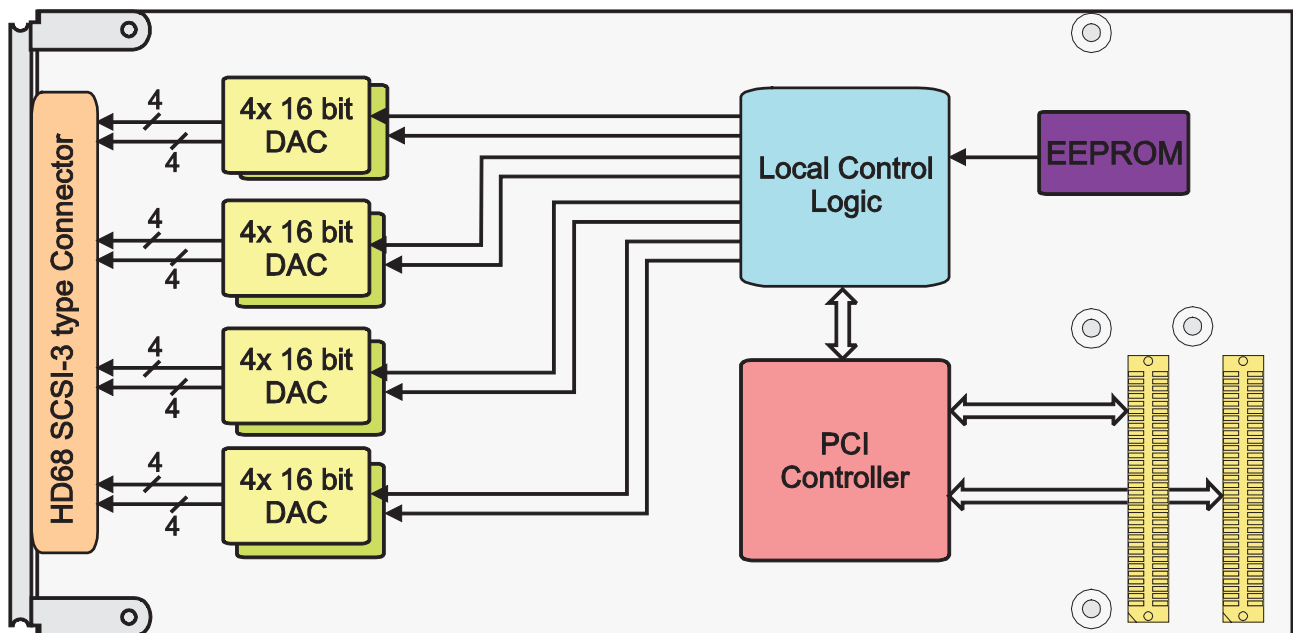

Order Information

RoHS Compliant

TPMC553-10R 32 Channel 16 bit D/A, sequencer, simultaneous update, progr. Vout, HD68
TPMC553-11R 16 Channel 16 bit D/A, sequencer, simultaneous update, progr. Vout, HD68

For the availability of non-RoHS compliant (lead solder) products please contact TEWS.

Documentation

TPMC553-DOC User Manual

Software

TDRV016-SW-25 Integrity Software Support
TDRV016-SW-42 VxWorks Software Support (Legacy and VxBus-Enabled Software Support)
TDRV016-SW-65 Windows Software Support
TDRV016-SW-82 Linux Software Support
TDRV016-SW-95 QNX Software Support

For other operating systems please contact TEWS.

Related Products

TA304 Cable Kit for Modules with HD68 Connector
TPIM002 PIM I/O Module, HD68 connector