


ComEth4080e

3U VPX 1/10/40 Gigabit Ethernet Switch

- 3U VPX
- Managed Layer 2+/3
- Up to 22 ports
- SFP+ (front)
- 10G BASE-T (front)
- 1GBASE-T (rear)
- 10G/40G BASE-KR4 (rear)

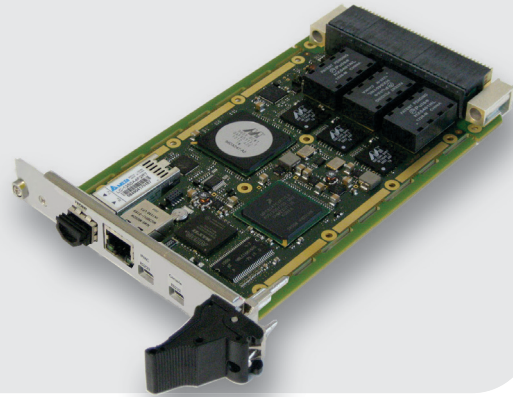

Not actual photo

The **ComEth4080e** is a cutting-edge 3U Layer 2/3 Ethernet switch designed for system integrators looking for high-speed Ethernet-based centralized architectures with a high-availability of external 1/10/40G Ethernet interfaces, and aiming at building sophisticated networks with «external» interfaces.

Description

Powered by the newest Marvell highly integrated System on a Chip (SoC) with programmable packet processors, and controlled by Switchware, the field-proven Interface Concept network management application, the ComEth4080e offers a high density of 1GbE, 10GbE and 40GbE ports on a 3U footprint.

ComEth4080e:

- 22 ports in a single board solution
 - 8 * 1GBASE-KX/10GBASE-KR [P1] or
 - 2 * 40GBASE-KR4 [P1]
 - 8 * 10M/100M/1GBASE-T [P1 & P2]
 - 4 * 10M/100M/1G/2.5G/5G/10G BASE-T [P2]
 - 1 * 1G/10G SFP+ [front panel]
 - 1 * 10M/100M/1G/2.5G/5G/10G BASE-T [front panel]

Switch Management

Switchware is a comprehensive switch management stack running on Interface Concept's Ethernet switch product line. It is running on the **ComEth4080e** on-board processor and supports a rich set of Layer 2/3 features controlled through the following interfaces:

- Graphical User Interface (GUI)
- Command Line Interface (CLI)
- SNMP (v2c or v3)

The **ComEth4080e** also supports VPX System Management in compliance with VITA 46.11 and based on the Intelligent Platform Management Interface (IPMI v1.5) for sensor management (temperature, voltage, current), inventory management, system configuration, recovery and diagnostic management.


The **ComEth4080e** is available in standard, extended, rugged air-cooled and conduction-cooled grades, as per Interface concept environmental grades.

powerBridge
Computer

Ehlbeek 15a
30938 Burgwedel
fon 05139-9980-0
fax 05139-9980-49

www.powerbridge.de
info@powerbridge.de

Block Diagram

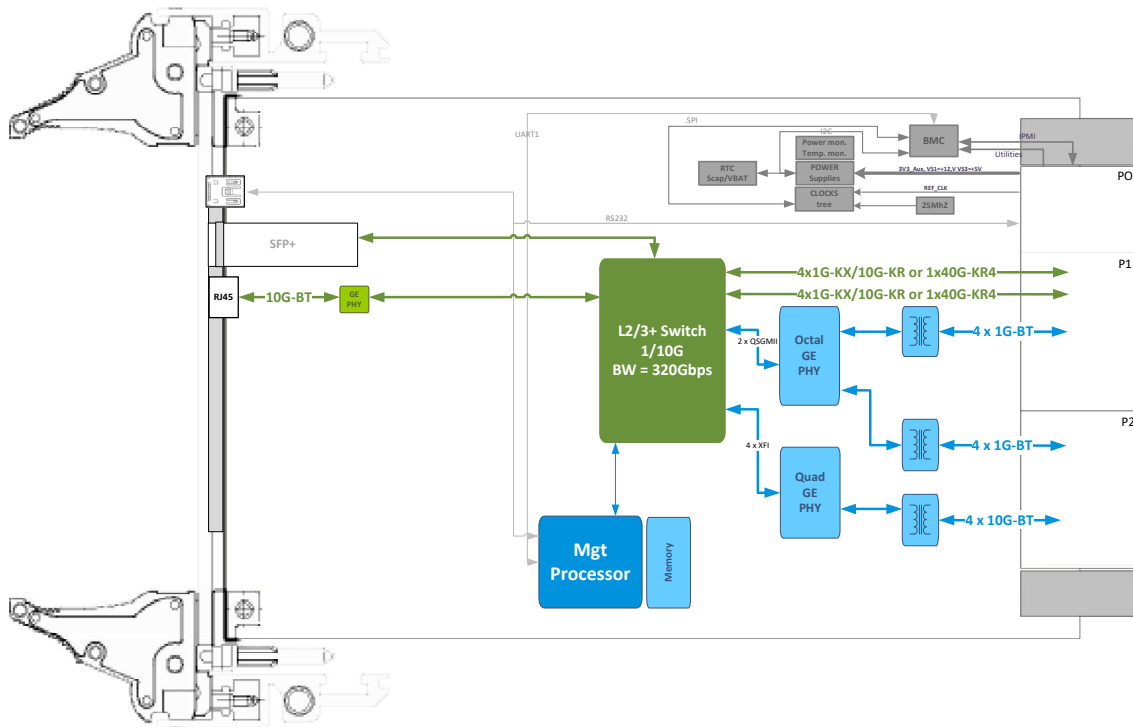

Main features

Layer 1/2

- Speed, duplex, auto-negotiation, flow control and power management on all ports
- VLAN support / 802.1Q tagging
- Port mirroring
- Port rights management
- Static MAC address list
- Static IPM address list
- Port static authentication
- IEEE 802.1X authentication
- Ingress filtering
- Storm prevention
- QoS on all ports
- Ingress / egress access lists
- Rate limiting
- QoS remarking
- Static trunking / LACP
- STP / RSTP
- IGMP/MLD snooping

Security Management

- Login/password, key or certificate authentication
- Secure switch management by HTTPS, SSH or SNMPv3
- 802.1X port-based authentication

QoS

- Layer 2 802.1p User Priority tagging
- Layer 3 IP DSCP (Diffsev)
- Access Control Lists (L2, L3, L4)

Multicast

- IGMP snooping (v1, v2, v3)
- MLD snooping (v1, v2)

Layer 3

- ICMP
- Proxy-ARP
- DHCP-relay
- NAT
- IPv4 routing (unicast/multicast)
- Static IP routing (unicast and multicast)
- RIPv1, RIPv2 (IPv4)
- RIPng(IPv6)
- OSPFv2 (IPv4) / OSPFv3(IPv6)

Others

- PBIT results
- Temperature information
- CPU load
- Switch state
- Global and detailed ports statistics
- VLANs statistics
- Bridge egress, ingress and RMON statistics
- Ingress and egress access lists statistics
- Rate limiting statistics
- Queues and ingress buffers counters
- IGMP snooping state by
- VLAN and by port
- MAC address table access
- IPM address table access
- STP/RTSP state

ComEth4080e

3U VPX 1/10/40 Gigabit Ethernet switch

Grades

Criterion	Coating	Operation Temperature	Rec. Airflow	Oper. HR% no cond.	Storage Temperature	Sinusoidal Vibration	Random Vibration	Shock 1/2 Sin. 11ms
Standard	Optional	0 to 55°C	1 .. 2 m/s	5 to 90%	-45 to 85°C	2G [20..2000]Hz	0.002g2 /Hz [10..2000]Hz	20G
Extended	Yes	-20 to 65°C	2 .. 3 m/s	5 to 95%	-45 to 85°C	2G [20..2000]Hz	0.002g2 /Hz [10..2000]Hz	20G
Rugged	Yes	-40 to 75°C or 85° C (*)	2 .. 5 m/s	5 to 95%	-45 to 100°C	5G [20..2000]Hz	0.05g2 /Hz [10..2000]Hz	40G
Conduction-Cooled 71°C	Yes	-40 to 71°C at the thermal interface (*)	-	5 to 95%	-45 to 100°C	5G [20..2000]Hz	0.05g2 /Hz [10..2000]Hz	40G
Conduction-Cooled 85°C	Yes	-40 to 85° C at the thermal interface (*)	-	5 to 95%	-45 to 100°C	5G [20..2000]Hz	0.1g2 /Hz [10..2000]Hz	40G

(*) : Temperature grades are subject to availability according to IC products. Please consult us.

All information contained herein is subject to change without notice.

www.interfaceconcept.com

For more information, please contact:



3, rue Félix Le Dantec
29000 QUIMPER
Tel. +33 (0)2 98 57 30 30
Fax. +33 (0)2 98 57 30 00
info@interfaceconcept.com