


Rugged 3U VPX I/O Intensive Plug In Card (PIC) based on Intel Xeon W-11000E Series Processor

Key Features

TR L9x/6sd-RCx is a rugged 3U VPX board based on the Intel Xeon W-11000E Series Processor for general purpose computer applications. It is designed in alignment with the SOSA Technical Standard for I/O intensive processor boards.

- Up to 8-core processor for high performance
- 100G Ethernet Data plane
- x4 Gen 4 PCI Express Expansion plane for high speed communication with adjacent board(s)
- XMC site for additional I/O resources
- Optional M.2 module for storage with Write/Protect and Opal 2.0 compliance
- Rugged conduction-cooled variant only

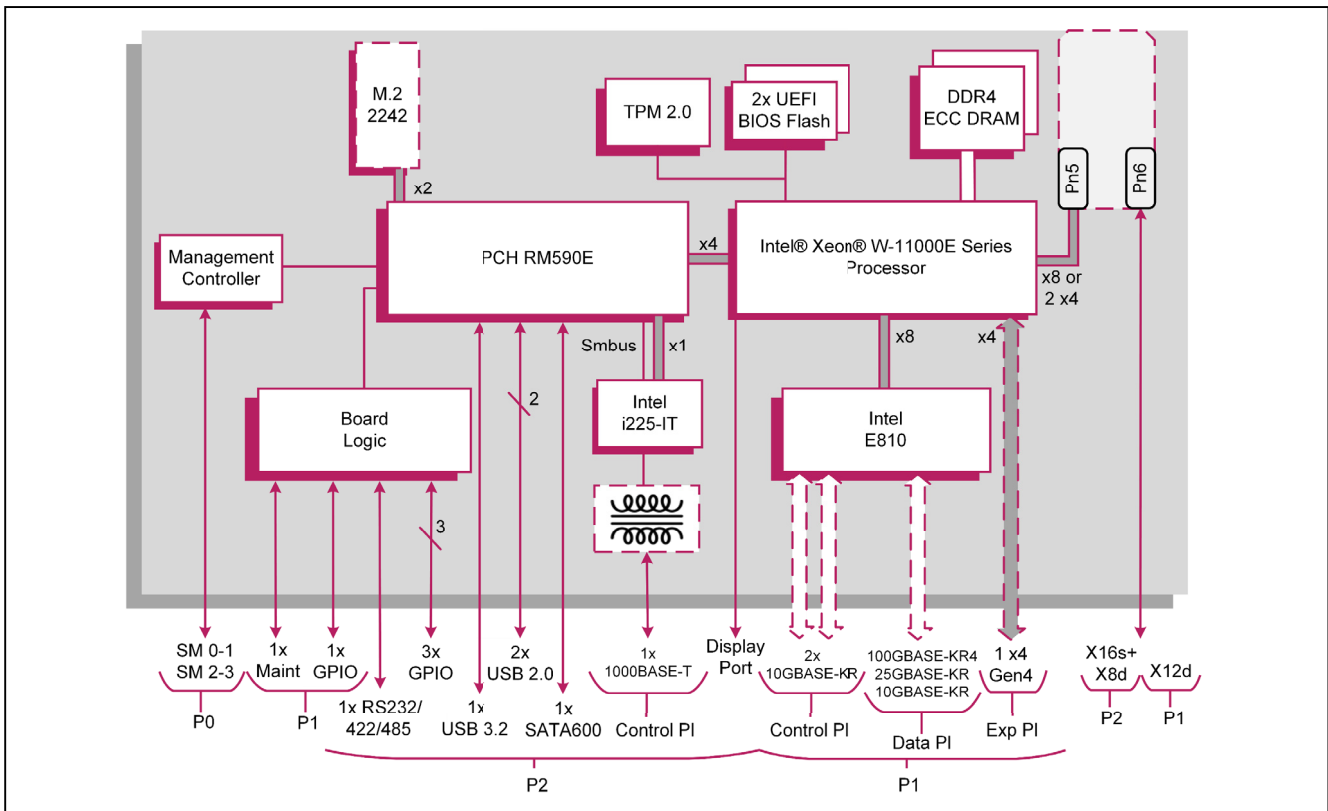

Specification

VPX Processor Board

- rugged conduction-cooled 3U VPX board utilizing processors based on Intel Xeon W-11000E Series Processor
- compliant with two OpenVPX module profiles:
 - SLT3-PAY-1F1F2U1TU1T1U1T-14.2.16
 - MOD3-PAY-1F1F2U1TU1T1U1T-16.2.15-4

Central Processor

- 8-core Intel Xeon W-11865MRE Processor (35W)
- 4-core Intel Xeon W-11155MRE Processor (35W)
- Intel Advanced Vector Extensions AVX-512
- Intel Vector Neuro Network Instructions (VNNI)
- Intel Iris Xe (Gen 12) Graphics Engine with up to 32 EUs
- range of performance/power factory build options

DRAM

- 32 Gbytes soldered DDR4 ECC DRAM:
 - ECC
 - single bit error correction
 - dual channel architecture

Optional XMC Site

- 1 x XMC site, in a single VPX slot (VITA 42.0):
 - XMC rear I/O, providing X12d+x16s+X8d
 - 1 x8 or 2 x4 PCI Express (PCIe)
 - PCIe Gen 1, Gen 2 and Gen 3
- XMC connector type (build option):
 - up to Gen 2, VITA 42 XMC (black color)
 - up to Gen 3, VITA 61 XMC 2.0 (white color)
- XMC VPWR +12V
- VITA 46.9 XMC I/O pin-out

Serial Ports

- 1 x RS232/422/485 port accessed via P2
- 1 x maintenance port accessed via P1
- Maintenance port on P1 supports RS232 or LVC MOS levels (build option)
- 16550 compatible UARTs

Graphics/Audio Interfaces

- 1 x graphics/audio interface:
 - DisplayPort v1.2 interface, supporting audio and video, via P2
 - up to 3840 x 2160 @ 60Hz, driver dependent

Other Peripheral Interfaces

- PC RTC, long duration timer, watchdog timer
- 2 x USB 2.0 and 1 x USB 3.2 (Gen 1) ports via P2
- 3 x GPIO signals via P2
- 1 x GPIO signal via P1

Mass Storage Interfaces

- 1 x SATA600 via P2
- 1 x M.2 SSD site supports:
 - 2242 format module
 - x2 PCIe interface (M-key)
 - Opal 2.0 security encryption
 - Write Protect
 - NVMe Express (NVMe) logical device interface

VPX Control Plane, Ethernet

- configurable Control Plane (VITA 46.6)
- 1 x 10/100/1000BASE-T Ethernet port via P2:
 - option for with or without magnetics
 - implemented by Intel Ethernet Controller I225-IT
- up to 2 x 10 Gigabit Ethernet ports via P1 (VITA 46.7):
 - supports up to 2 x 10GBASE-KR
 - implemented by Intel Ethernet Controller E810 via x8 PCIe
 - factory build option available to disable Control Plane
- supports IEEE 1588 Precision Time Protocol

VPX Data Plane, 100G Ethernet

- configurable Ethernet VPX Data Plane fabric interface (VITA 46.7)
- 1 x 100 Gigabit Ethernet ports via P1 (VITA 46.7):
 - supports 1 x 100GBASE-KR4 or 1 x 25GBASE-KR or 4 x 10GBASE-KR
 - implemented by Intel Ethernet Controller E810 via x8 PCIe
 - factory build option available to disable Data Plane
- supports IEEE 1588 Precision Time Protocol

VPX Expansion Plane, PCI express

- configurable PCI Express (PCIe) VPX Expansion Plane fabric interface (VITA 46.4):
 - 1 x4 Gen 4
 - factory build option available to disable Expansion Plane
- PCIe interfaces support Gen 1, Gen 2, Gen 3 and Gen 4

Optional Built-In Test (BIT) Support

- power-on BIT, Initiated BIT, Continuous BIT

System Management

- VITA 46.11 IPMC on board controller:
 - SMO-1 and SM2-3
 - CPU temperature and voltage monitor accessed via System Management interface
- option for VITA 46.11 compatible Tier 1 Chassis Manager

Board Security Packages

- Trusted Platform Module (TPM 2.0)
- supports Total Memory Encryption, ROP Attack Prevention and Advanced Crypto-Key Protection
- option for Sanitization Utility Software Package
- option for proprietary board-level security features

Software Support

- supports Linux and Windows
- for other operating systems such as VxWorks, contact Concurrent Technologies for further information
- options available for enhanced PCIe drivers

Firmware Support

- dual 32 Mbyte BIOS SPI Flash EPROMs
- UEFI boot firmware (BIOS):
 - UEFI 2.7 support
 - implements Secure Boot
- implements Intel Boot Guard
- optional Fast Boot solution using the Intel Firmware Support Package (FSP)
- LAN boot firmware included

Safety

- PCB (PWB) manufactured with flammability rating of UL94V-0

Electrical Specification (Estimated)

- typical current figure for Intel Tiger Lake-H Processor with 32 Gbytes DRAM:
 - +12V VS1 @ 3.5A
 - +3.3V AUX @ 0.4A
- +12V AUX and -12V AUX routed to XMC site
- +5V and +3.3V are not connected

Environmental Specification

- conduction-cooled (VITA 48.2)
- operating temperature at card edge:
 - VITA 47 Class CC4, -40 C to +85 C (RC-Series)
- non-operating temperature:
 - VITA 47 Class C4, -55 C to +105 C
- operating altitude:
 - -1,500 to 60,000 feet (-460 to 18,300 meters)
- rapid decompression:
 - from 8,000 to 60,000 feet (from 2440 to 18,300 meters)
- relative humidity: 5% to 95%, non-condensing

Mechanical Specification

- 3U VPX form-factor (VITA 46.0, VITA 48.0)
- 3.9 inches x 6.3 inches (100mm x 160mm)
- slot width (VITA 48.0):
 - 1.0-inch VPX-REDI Type 1, RCR-Series, Type 1 Extended Covers Two Level Maintenance (VITA 48.2)
- connectors to VITA 46.0 for P0, P1 and P2
- operating mechanical:
 - shock - VITA 47 Class OS2, 40g
 - random vibration - VITA 47 Class V3, 0.1g /Hz