
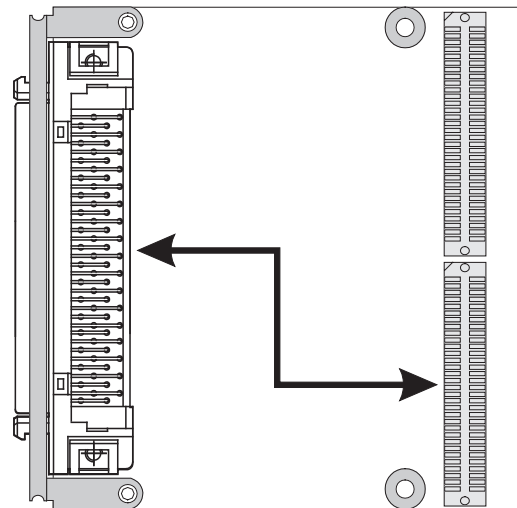


TPIM002 PIM I/O Module with 68 pin Connector

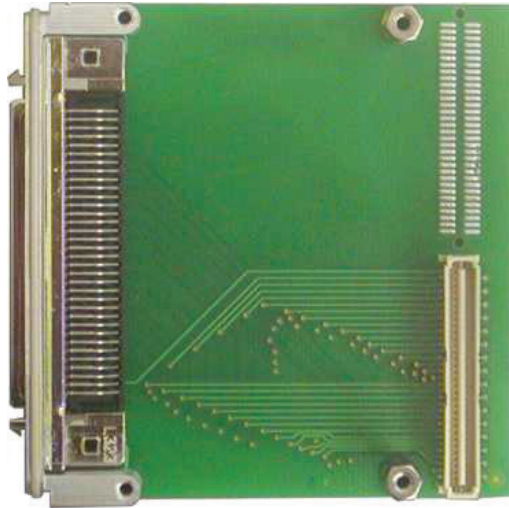

Application Information

The TPIM002 is a standard single-width PIM I/O module to be used with any PIM carrier. It offers easy access to the PMC back I/O lines of PMC carrier with back I/O.

The TPIM002 distributes all PMC back I/O lines to a 68 pin SCSI-3 type connector located in the EMI front panel.

The operating temperature range is -40°C to +85°C.

Technical Information

- Standard single-width PIM I/O Module
- Board size: 69 mm x 74 mm
- I/O lines are routed to a HD68 SCSI-3 type connector in the front panel
- EMI Front Panel
- Operating Temperature: -40°C to +85°C

Order Information

RoHS Compliant

TPIM002-10R PIM I/O Module, HD68 connector

For the availability of non-RoHS compliant (lead solder) products please contact TEWS.

Documentation

TPIM002-DOC User Manual



Ehlbeek 15a
30938 Burgwedel
fon 05139-9980-0
fax 05139-9980-49

www.powerbridge.de
info@powerbridge.de

range technical specification without further notice.
ative owners.

TEWS TECHNOLOGIES GmbH
Am Bahnhof 7 25469 Halstenbek, Germany
Phone: +49 (0) 4101 4058 0 Fax: +49 (0) 4101 4058 19
e-mail: info@tews.com www.tews.com

Issue 1.0.1
2017-08-31